

深圳市超越世纪电子有限公司

1.0mm Female Header, Single/Dual Row, Straight

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Phosphor Bronze

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.



绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V

额定电流Current Rating: 0.75 AMP

适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistancet: 255°C ±5°C, 3s-5s max

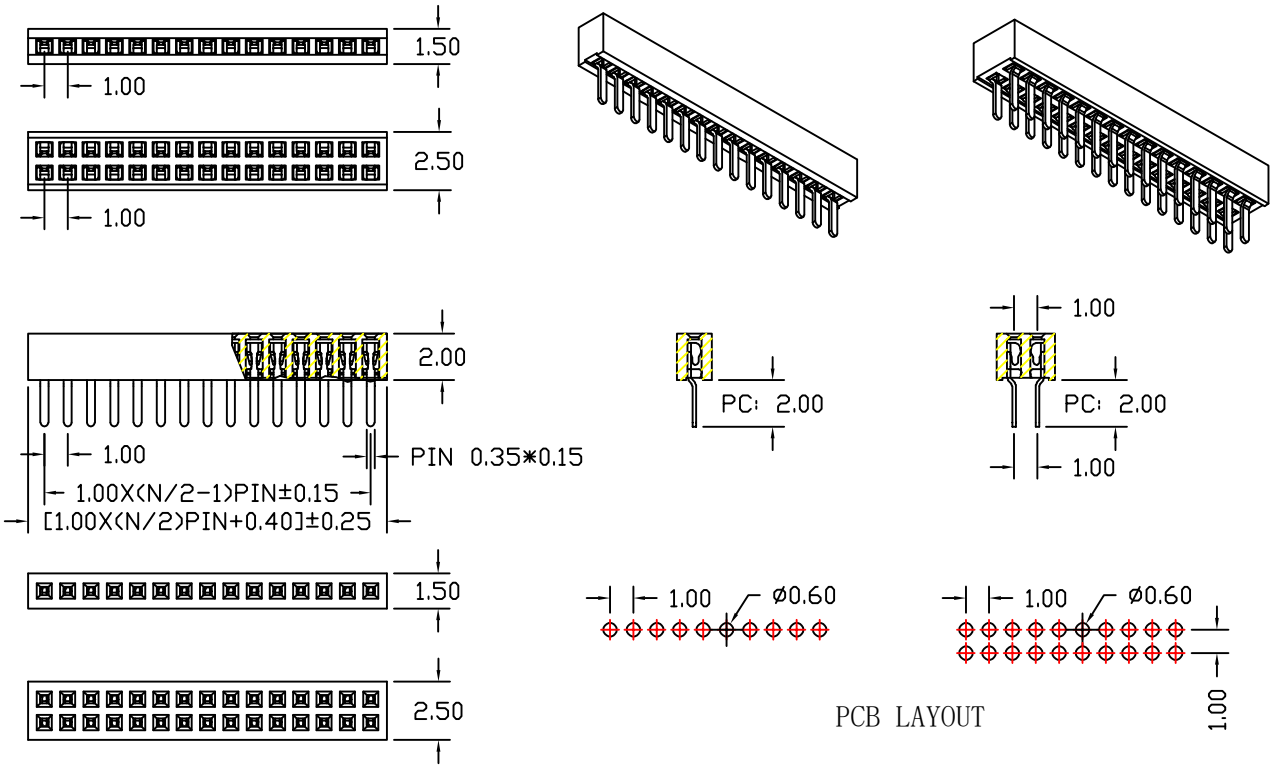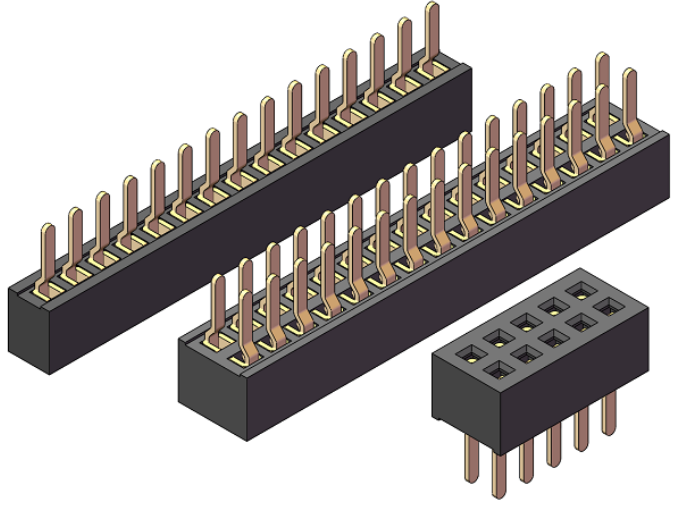

订购方法 How To Order

| | | | | | | | |
|----------------------------|---|---|--|----------------------------------|---|-----------------------------------|------------|
| 1.0排母 | H | B | XX | S | T/A | G0 | XXX |
| Plastics Height H=2.0MM | Material Type A=PBT B=Nylon-6T C=LCP D=Nylon-46 | NO. of Positions Per Row 1X50 2X50 | S: Straight(180°) R: Right Angle(90°) M: S.M.T | T: TIN(镀锡) A: Aureate (镀金) | Contact Plating SN: Tin G0: Gold Flash G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold S0: Gold Flash/Tin Standard: G0 | Pin Length 2.0 DIP端子 PC=2.0 | |

常规表达: 型号 (1.0排母座) - 胶芯高度 (H) - 规格 (1 or 2*XXP) - 类型 (S) - 接触件镀层 (XXU") - 尺寸 (PC)

* 其它要求的产品另外说明 Other requests's product on the other hand description