

## 深圳市超越世纪电子有限公司

### 1.27mm Female Header, Single Row, Right Angle

#### SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)  
Standard: PA6T Black

接触件Contacts: Phosphor Bronze

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.






绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V

额定电流Current Rating: 1.0 AMP


适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistance: 255°C ± 5°C, 3s-5s max

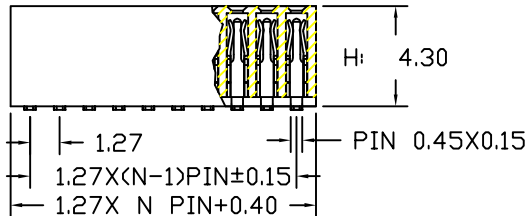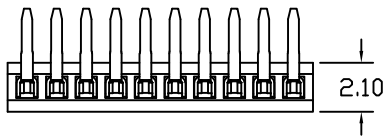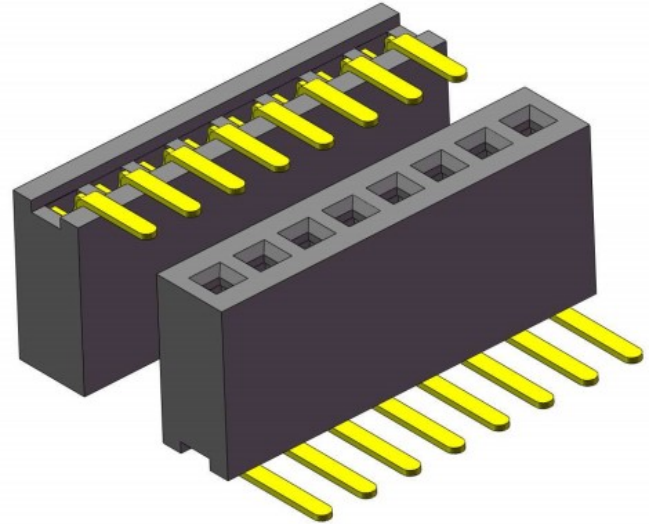



2.40±0.20

(4.3 90度端子折弯)



1.50±0.20

(4.3 PC2.4端子折弯)

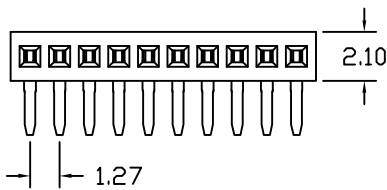

PCB LAYOUT

#### 订购方法 How To Order

1.27排母

H

B

XX

R

T/A

G0

XXX

Plastics Height  
H=4.3MM

Material Type  
A=PBT  
B=Nylon-6T  
C=LCP  
D=Nylon-46

NO. of Positions  
Per Row  
1X50

S: Straight(180°)  
R: Right Angle(90°)  
M: S.M.T

T: TIN(镀锡)  
A: Aureate  
(镀金)

Contact Plating  
SN: Tin  
G0: Gold Flash  
G2: 5u" Gold  
G3: 10u" Gold  
G4: 15u" Gold  
G5: 30u" Gold  
S0: Gold Flash/Tin  
Standard: G0

Pin Length

1.4.3 90度端子  
短端=L6.65  
2.4.3 PC2.4端子

常规表达: 型号 (1.27排母座) - 胶芯高度 (H) - 规格 (1\*XXP) - 类型 (R) - 接触件镀层 (XXU") - 尺寸 (PC=1.5/2.4)

\* 其它要求的产品另外说明 Other requests's product on the other hand description