

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Phosphor Bronze

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.




绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V


额定电流Current Rating: 1.0 AMP

适用温度范围Operating Temperature: -40°C to +105°C



耐温性能Temperature resistance: 255°C ± 5°C, 3s-5s max

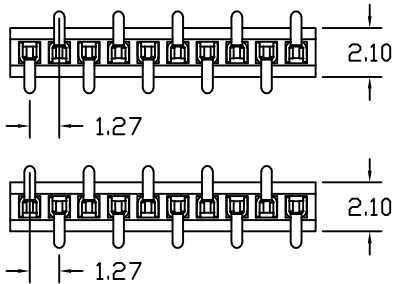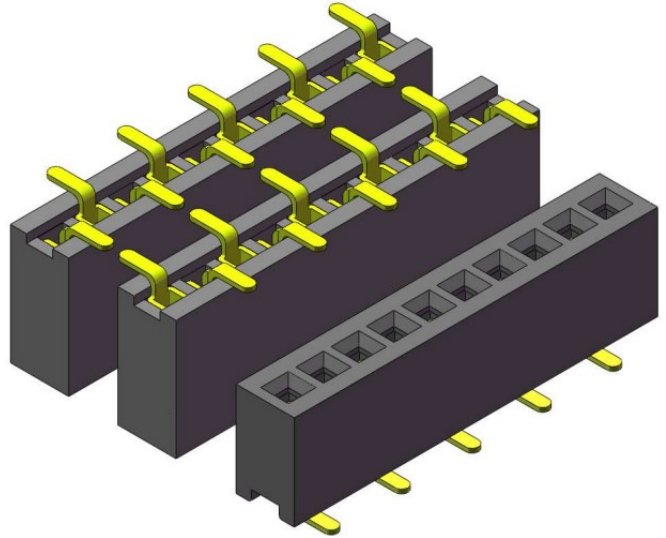


TYPE 1 (反脚位)




TYPE 2 (正脚位)

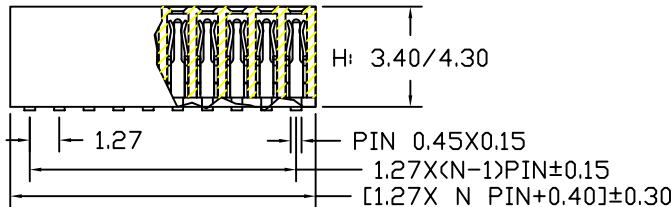

NO: 1




TYPE 1 (反脚位)



TYPE 2 (正脚位)

NO: 1

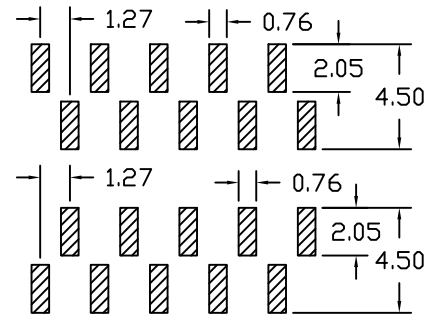

PCB LAYOUT

订购方法 How To Order

1.27排母

H
Plastics Height
H=3.4MM
H=4.3MM

B
Material Type
A=PBT
B=Nylon-6T
C=LCP
D=Nylon-46

XX
NO. of Positions
Per Row
1X50

M
S: Straight(180°)
R: Right Angle(90°)
M: S.M.T

T/A
T: TIN(镀锡)
A: Aureate
(镀金)

G 0
Contact Plating
SN: Tin
G0: Gold Flash
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
S0: Gold Flash/Tin
Standard: G0

XXX
Pin Length
3.4/4.3 U型SMT端子
W=4.80

常规表达: 型号 (1.27排母座) - 胶芯高度 (H) - 规格 (1*XXP) - 类型 (M) - 接触件镀层 (XXU") - 尺寸 (W: 3.40)

* 其它要求的产品另外说明 Other requests's product on the other hand description