

### 1. 27mm, 0.40SQ Board Spacer, Single Row, Straight/Right Angle

#### SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)  
Standard: PA6T Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.


绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V





额定电流Current Rating: 1.0 AMP

适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistancet: 255°C ± 5°C, 3s-5s max

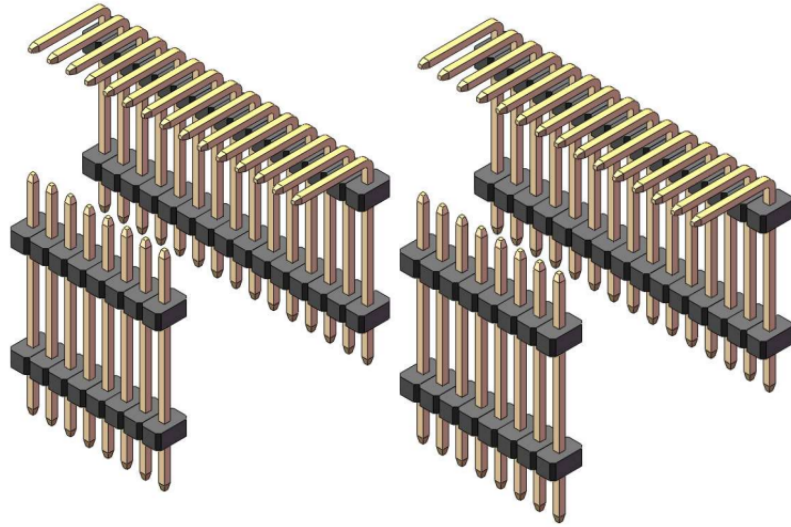

Unit:mm

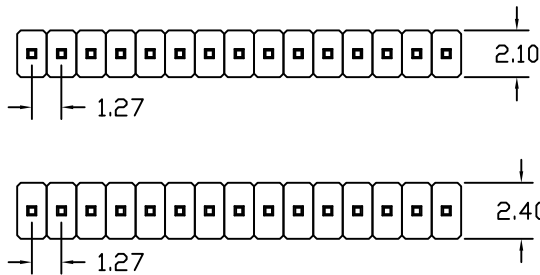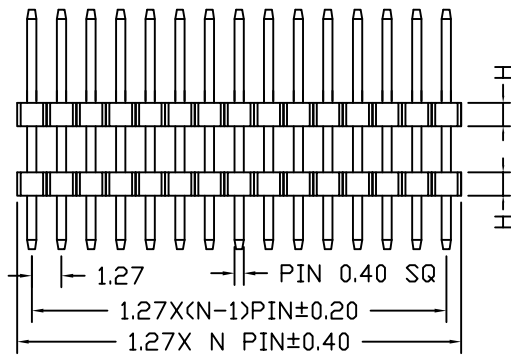

PCB LAYOUT

#### 订购方法 How To Order

**1.27排针**

**H**  
Plastics Height  
H=1.0mm(胶宽2.1)  
H=1.5mm(胶宽2.4)  
H=1.7mm(胶宽2.4)  
H=2.0mm(胶宽2.4)  
H=2.54mm(胶宽2.4)

**B**  
Material Type  
A=PBT  
B=Nylon-6T  
C=LCP  
D=Nylon-46

**XX**  
NO. of Positions  
Per Row  
01 thru 50

**S/R**  
S: Straight(180°)  
R: Right Angle(90°)  
M: S.M.T

**T/A**  
T: TIN(镀锡)  
A: Aureate  
(镀金)

**G 0**  
Contact Plating  
SN: Tin  
G0: Gold Flash  
G2: 5u" Gold  
G3: 10u" Gold  
G4: 15u" Gold  
G5: 30u" Gold  
S0: Gold Flash/Tin  
Standard: G0

**XXX**  
Pin Length  
XXX=A+B+C  
XXX=A+B+C+D+1.05  
(塑宽2.1)  
XXX=A+B+C+D+1.25  
(塑宽2.4)

常规表达: 型号 (1.27单排针座) - 胶芯高度 (H) - 材质 (PA6T) - 规格 (1\*XXP) - 类型 (S/R) - 接触件镀层 (XXU") - 尺寸 (XXX)

\* 其它要求的产品另外说明 Other requests's product on the other hand description