

1

2

3

4

5

6

| VERSION | VERSION OF THIS DESCRIPTION | DATE |
|---------|-----------------------------|------------|
| A | NEW DRAWINGS ISSUED | 2021/12/30 |
| B | DESIGN CHANGES | 2021/12/31 |





技术参数 (SPECIFICATIONS)

材料 (Material):




Insulator: PBT/PA6T (UL94V-0), Black
 绝缘体 (外壳): PBT/PA6T (防火等级V-0), 黑色
 Contacts: Brass/Phosphor Bronze
 接触件: 黄/磷青铜
 Plating: Gold Flash/SN over 30 μ" Ni
 电镀: 30 μ" 镍底上镀金/锡

电气特性 (Electrical Characteristics):

Contact Resistance: 20mΩ Max.
 接触电阻: 20mΩ Max.
 Insulator Resistance: 1000MΩ Min.
 绝缘电阻: 1000MΩ Min.
 Withstanding Voltage: AC 500V
 耐压值: AC 500V
 Current Rating: 1 AMP
 额定电流: 1 AMP
 Operating Temperature range: -40°C to +105°C
 适用温度范围: -40°C to +105°C
 Spacing: 1.27
 间距: 1.27

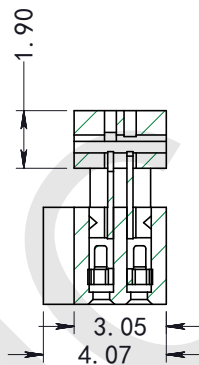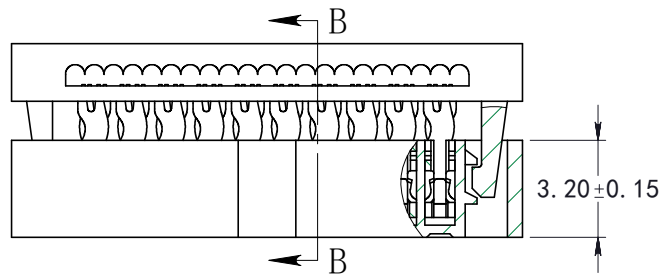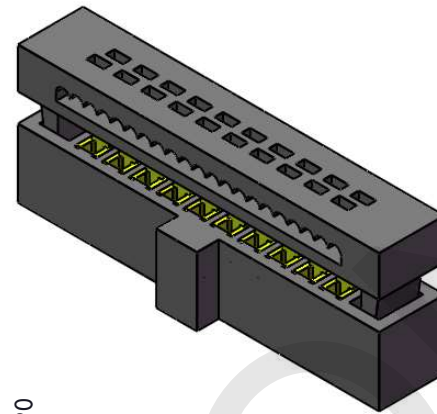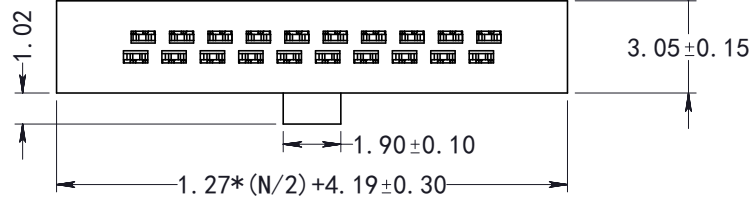

B-B

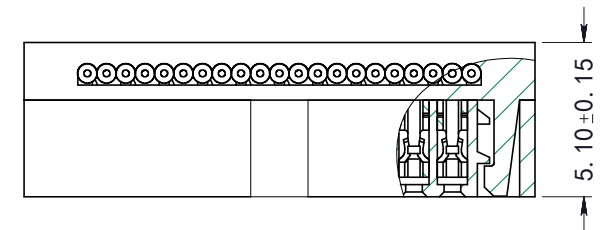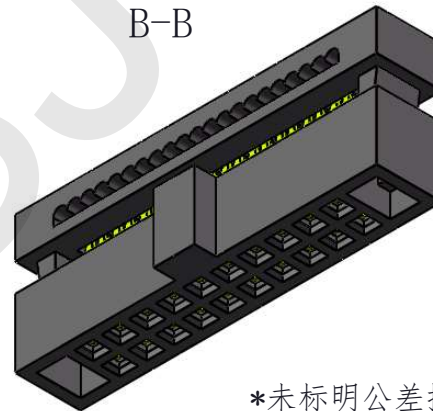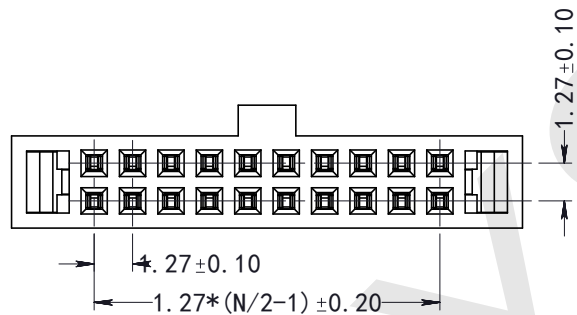

After Assembly

未标明公差按公差分段

| | | | |
|--|--|--|--|
| | | | |
| | | | |

| 塑胶材质 | 电镀处理 | UNITS | SCALE | APPROVED | DESIGN | PRODUCT NAME | FC 1.27*1.27-XXP | | |
|----------|-------------------|-------------------------|-------|-------------------|-------------|------------------------------|------------------|---------|----|
| PBT/PA6T | Gold Flash | MM | 4:1 | ZHAOZHEN JIANG | CHEN YUN | CYEJCONN [®] | 深圳市超越世纪电子有限公司 | | |
| 公差 分段 | >10 <10 < 3 | ±0.30 ±0.25 ±0.10 | | PARTS DRAWING | | PAGES | 1/1 | Drawing | A4 |

1

2

3

4

5

6