

#### SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)  
Standard: PA6T Black

接触件Contacts: Brass/Phosphor Bronze

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.





绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V


额定电流Current Rating: 1.5 AMP

适用温度范围Operating Temperature: -40°C to +105°C


耐温性能Temperature resistancet: 255°C ±5°C, 3s-5s max

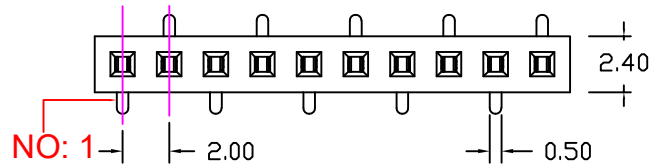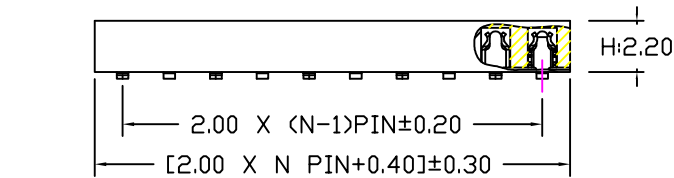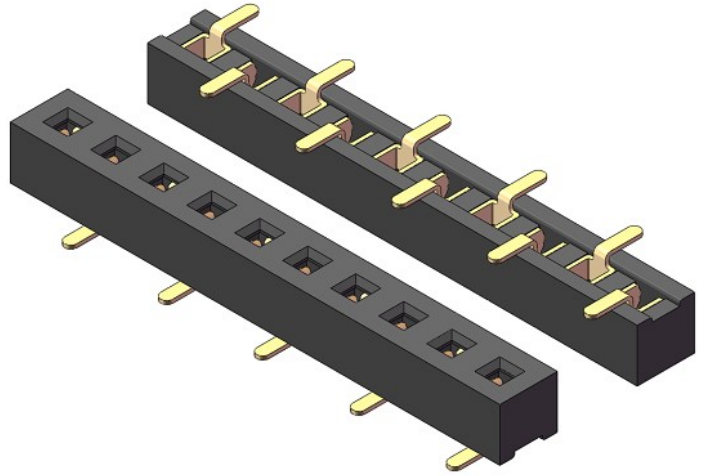


TYPE 1 正脚位

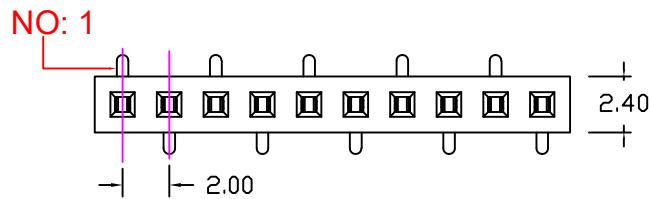

TYPE 2 反脚位

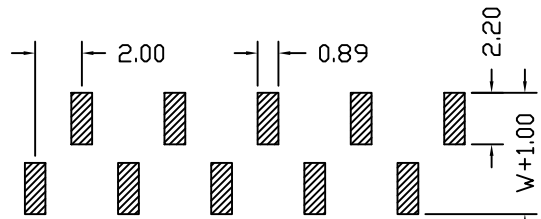


TYPE 1 正脚位

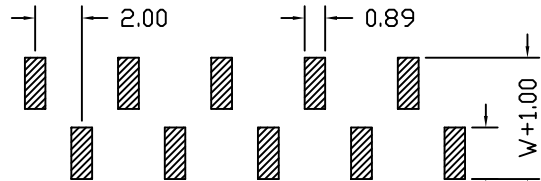

TYPE 2 反脚位

PCB LAYOUT

#### 订购方法 How To Order

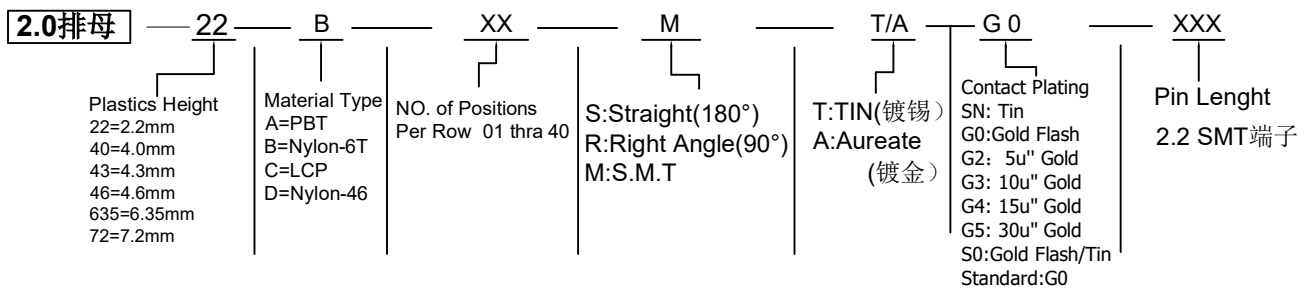

常规表达: 型号 (2.0排母座) - 胶芯高度 (H) - 规格 (1\*XXP) - 类型 (M) - 接触件镀层 (XXU") - 尺寸 (W=4.2)

\* 其它要求的产品另外说明 Other requests's product on the other hand description