

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Brass/Phosphor Bronze

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.








绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V

额定电流Current Rating: 1.5 AMP

适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistance: 255°C ± 5°C, 3s-5s max

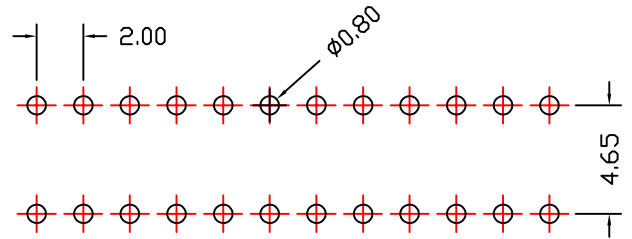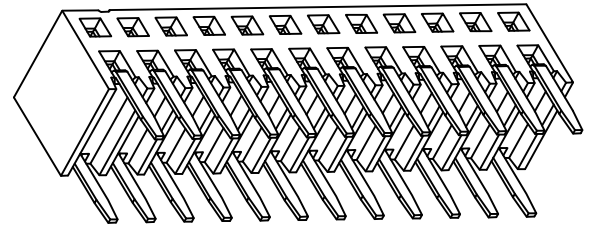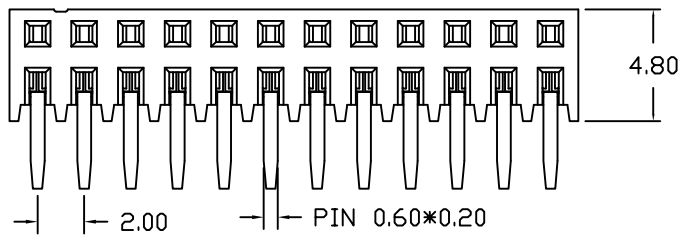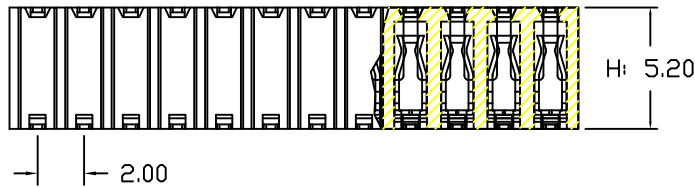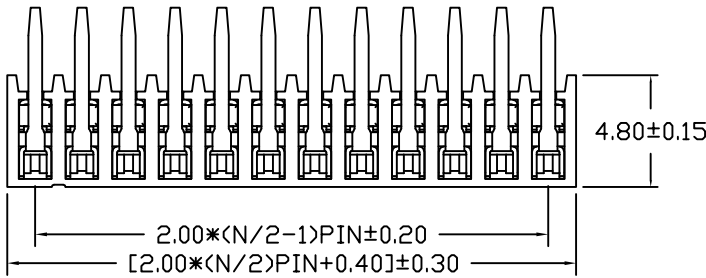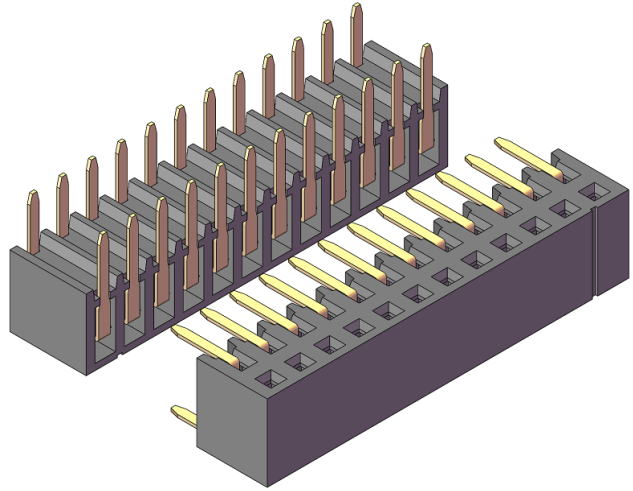

PCB LAYOUT

订购方法 How To Order

2.0排母

H
Plastics Height
H=5.20mm

B
Material Type
A=PBT
B=Nylon-6T
C=LCP
D=Nylon-46

XX
NO. of Positions
Per Row
02~22

R
S: Straight(180°)
R: Right Angle(90°)
M: S.M.T

T/A
T: TIN(镀锡)
A: Aureate
(镀金)

G 0
Contact Plating
SN: Tin
G0: Gold Flash
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
S0: Gold Flash/Tin
Standard: G0

XXX
Pin Length
5.2 U型双侧插端子

常规表达: 型号 (2.0排母座) - 胶芯高度 (H) - 规格 (2*XXP) - 类型 (R) - 接触件镀层 (XXU") - 尺寸 (XXX)

* 其它要求的产品另外说明 Other requests's product on the other hand description