

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.




绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V


额定电流Current Rating: 1.5 AMP

适用温度范围Operating Temperature: -40°C to +105°C



耐温性能Temperature resistancet: 255°C ±5°C, 3s-5s max

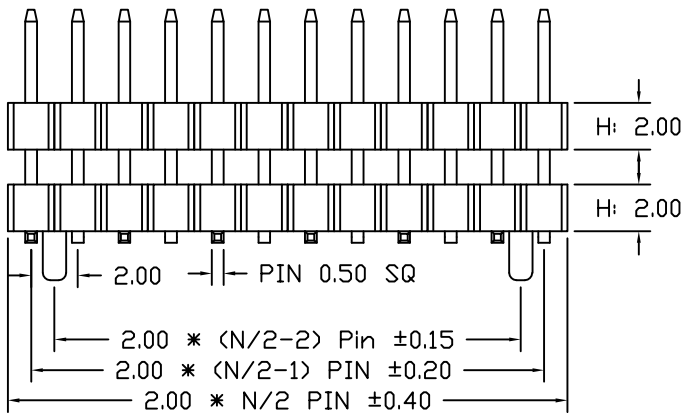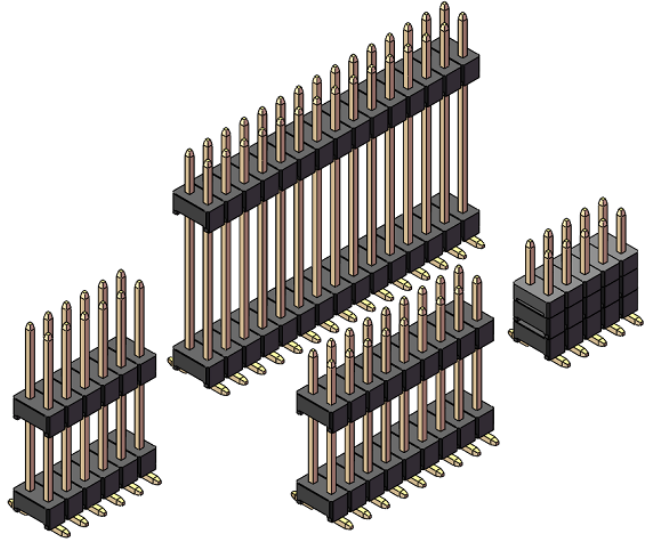

Unit:mm




可带内柱

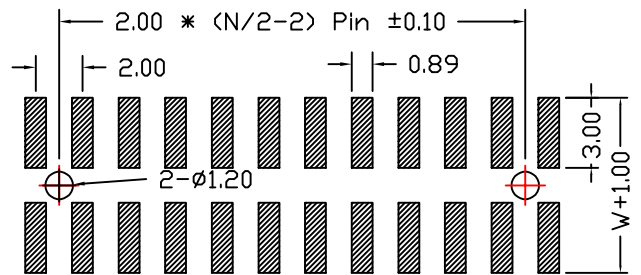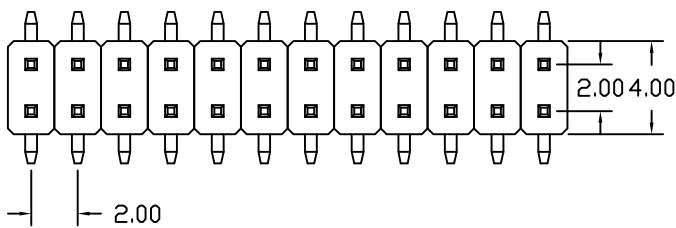

PCB LAYOUT

订购方法 How To Order

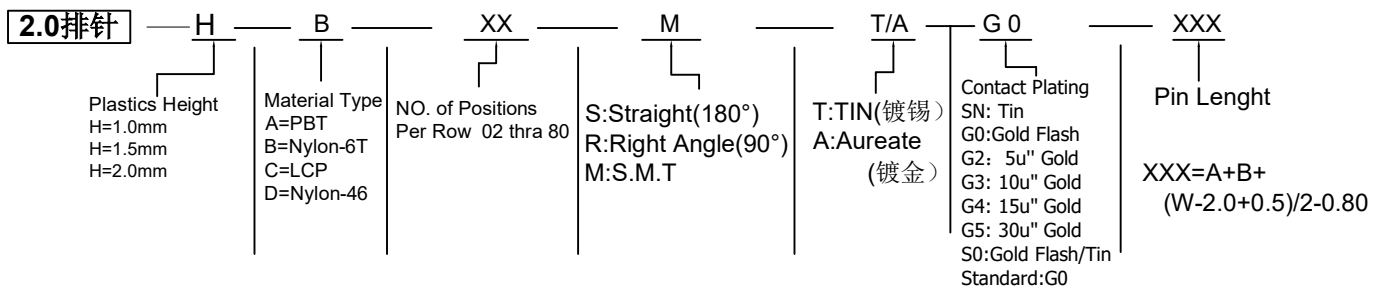

常规表达: 型号(2.0双排针座)-胶芯高度(H)-材质(PA6T)-规格(2*XXP)-类型(M)-接触件镀层(XXU")-尺寸(XXX)

* 其它要求的产品另外说明 Other requests's product on the other hand description