

2.54mm Female Header, Single/Dual Row, Top Entry, Straight

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PBT Black

接触件Contacts: Phosphor Bronze

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.



绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V

额定电流Current Rating: 3 AMP

适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistance: 205°C ±5°C, 3s-5s max

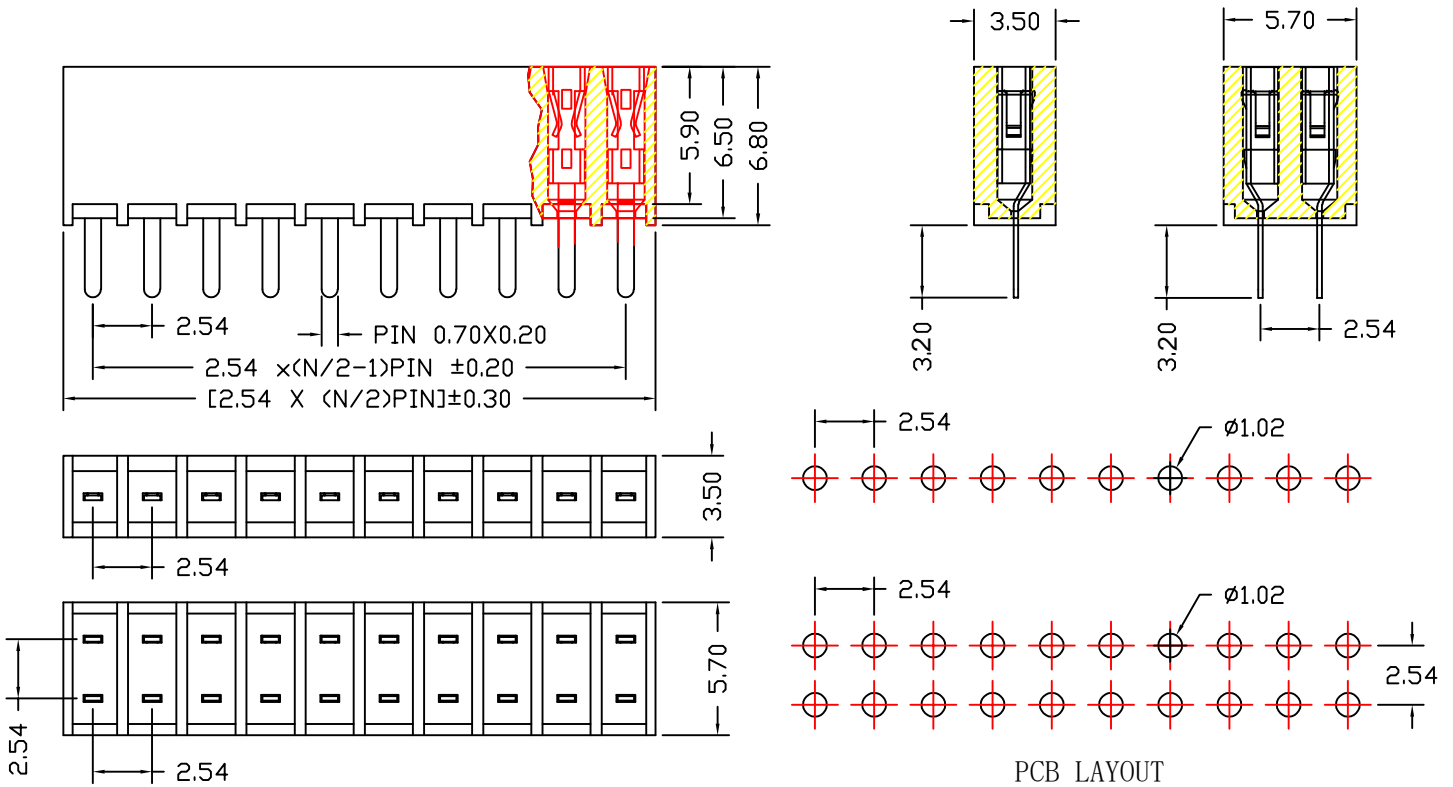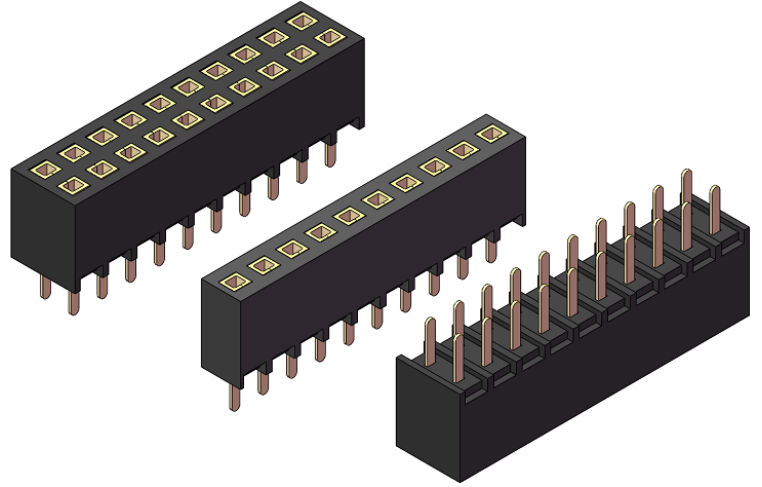

订购方法 How To Order

2.54排母	68	A	XX	S	T/A	G0	XXX
Plastics Height 35=3.5mm 50=5.0mm 57=5.7mm 68=6.8mm 71=7.1mm 80=8.0mm 81=8.1mm 85=8.5mm 11=11mm	Material Type A=PBT B=Nylon-6T C=LCP D=Nylon-46	NO. of Positions Per Row 02 thru 40	S: Straight(180°) R: Right Angle(90°) M: S.M.T	T: TIN(镀锡) A: Aureate (镀金)	Contact Plating SN: Tin G0: Gold Flash G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold S0: Gold Flash/Tin Standard: G0	Pin Length 6.8四面包端子 PC3.5	

常规表达: 型号 (2.54排母座) - 胶芯高度 (H) - 规格 (1 or 2*XXP) - 类型 (S) - 接触件镀层 (XXU") - PC尺寸 (XXX)

* 其它要求的产品另外说明 Other requests's product on the other hand description