

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.





绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V



额定电流Current Rating: 3 AMP

适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistancet: 255°C ± 5°C, 3s-5s max

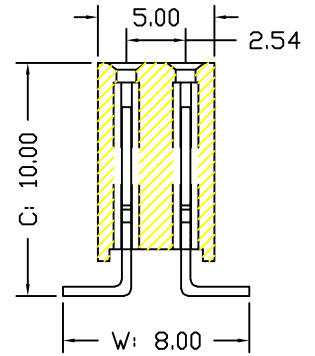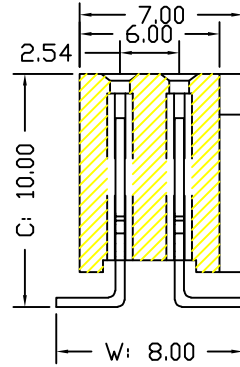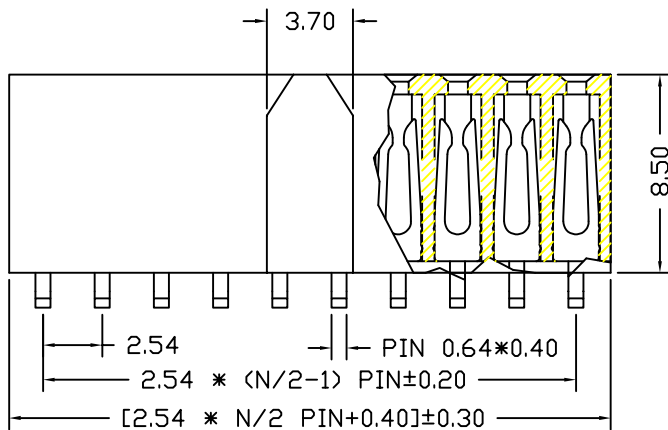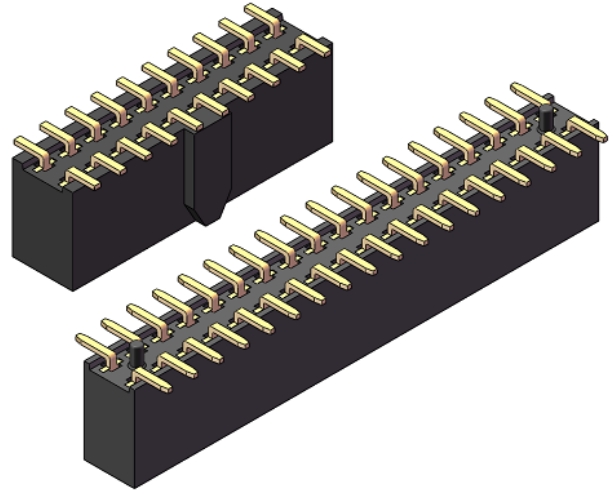

Y型排母可带/不带凸台、C跟W尺寸可以根据客户需求调整

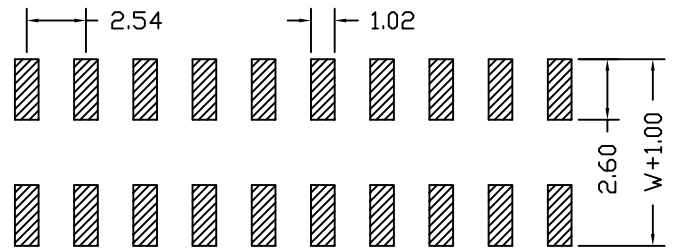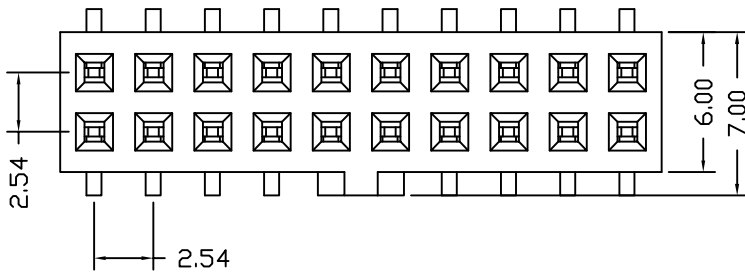

PCB LAYOUT

订购方法 How To Order

2.54排母

85

B

XX

M

T/A

G 0

XXX

Plastics Height
35=3.5mm
50=5.0mm
57=5.7mm
68=6.8mm
71=7.1mm
80=8.0mm
81=8.1mm
85=8.5mm
11=11mm

Material Type
A=PBT
B=Nylon-6T
C=LCP
D=Nylon-46

NO. of Positions
Per Row 02 thru 40

S: Straight(180°)
R: Right Angle(90°)
M: S.M.T

T: TIN(镀锡)
A: Aureate(镀金)

Contact Plating
SN: Tin
G0: Gold Flash
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
S0: Gold Flash/Tin
Standard: G0

Pin Length
8.5 Y型 L12.7 端子

常规表达: 型号 (2.54排母座) - 胶芯高度 (H) - 规格 (2*XXP) - 类型 (M) - 接触件镀层 (XXU") - 尺寸 (XXX)

* 其它要求的产品另外说明 Other requests's product on the other hand description