

#### SPECIFICATIONS

**材质Material:**

绝缘体 (Insulator): Polyester (UL94V-0)  
Standard: PBT Black

接触件Contacts: Brass or Phosphor Bronze

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

**电气性能Electrical Characteristics:**

接触电阻Contact Resistance: 20mΩ Max.

绝缘电阻Insulator Resistance: 5000MΩ Min. At 500V DC




耐电压Withstanding Voltage: 1000V AC/Minute

额定电流Current Rating: 3 AMP


耐温性能Temperature resistance: 205°C ± 5°C, 3s-5s max

插入力Insertion Force: 0.4Kgf Max. Per Pair



拔出力Withdrawal Force: 0.25Kgf Max. Per Pair

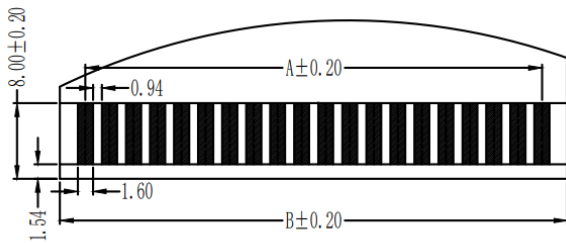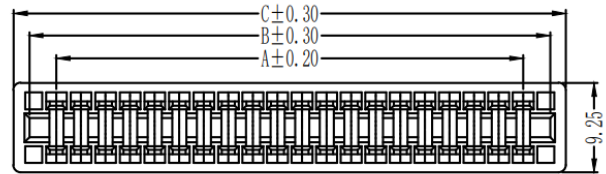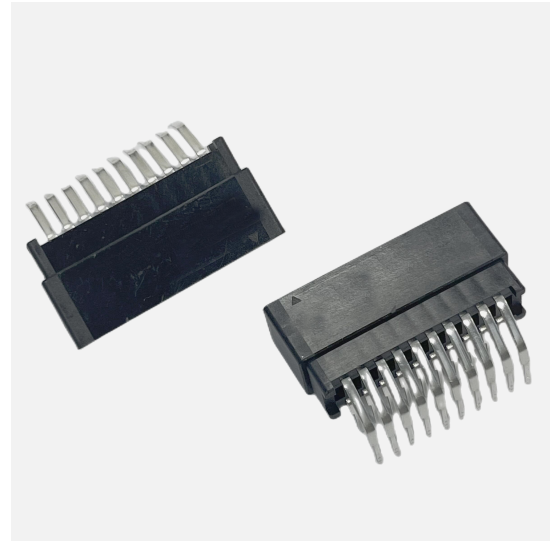

Recommended Card Layout

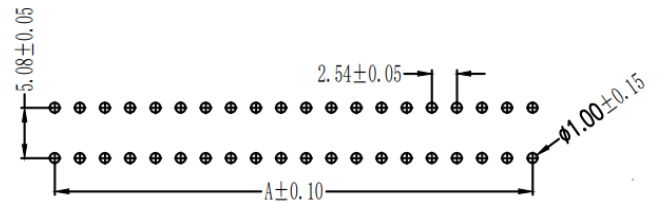

Recommended P.C.B. Layout

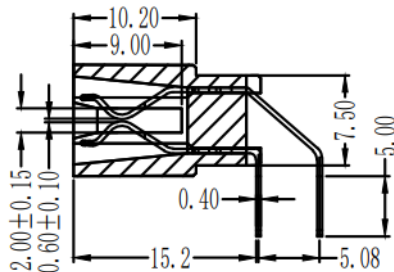

可选Pin数: 4-128 Pins  
Number Of Pins: 4-128 Pins

\* 其它要求的产品另外说明 Other requests's product on the other hand description