

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PBT Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.



绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V

额定电流Current Rating: 3 AMP

适用温度范围Operating Temperature: -40°C to +105°C



耐温性能Temperature resistancet: 205°C ± 5°C, 3s-5s max

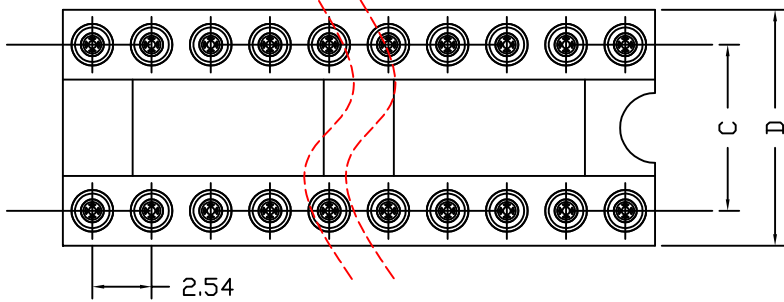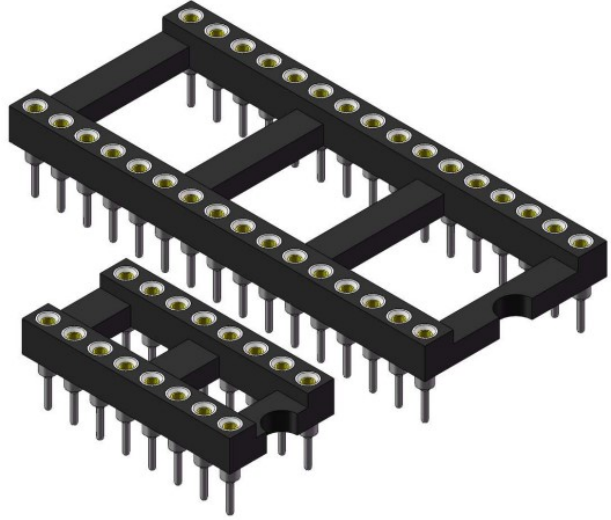

PIN NO.	A	B
06	5.08	7.62
08	7.62	10.16
14	15.24	17.18
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40
24	27.94	30.48
28	33.02	35.56


PIN NO.	A	B
20	22.86	25.54
22	25.40	28.08

PIN NO.	A	B
24	27.94	30.48
28	33.02	35.56
32	38.10	40.64
40	48.26	50.80
48	58.42	60.96

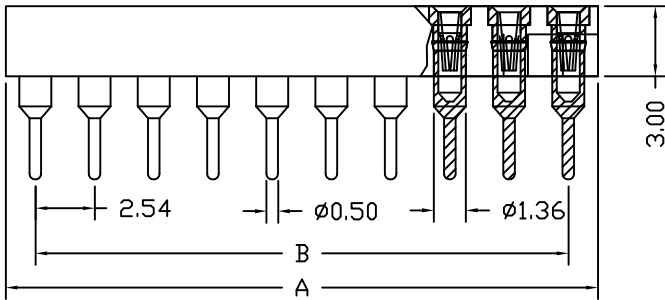

PIN NO.	C	D
06~28Pin	7.62	10.18
06~28Pin	10.16	12.72
24~48Pin	15.24	17.80

订购方法 How To Order

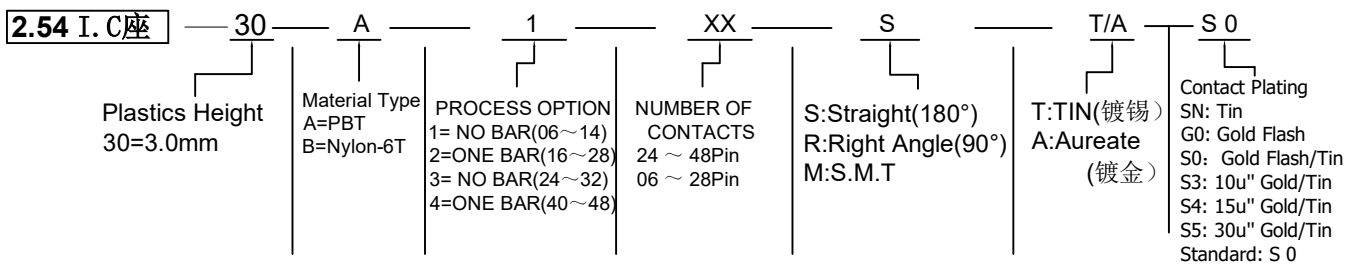

常规表达: 型号 (2.54 IC 座) - 材质 (PBT) - 规格 (XXP) - 类型 (S) - 接触件镀层 (XXU")

* 其它要求的产品另外说明 Other requests's product on the other hand description